



# All in One POS Terminal PT-6200




## When small business needs POS...the answer is the PT-6200!!

Partner Tech is pleased to announce the new revolution of POS solutions in the fanless all-in-one PT-6200 terminal. The PT-6200 terminal is designed around the POS solution needs of small to medium businesses. The system is an affordable, easy to use, fully integrated terminal that immediately adds value to your company to help better manage your business. This compact powerhouse unit has a 10.4inch LCD touch screen, 80mm thermal receipt printer, rear facing customer display, and a 1,2,3 track MSR all integrated in a small footprint, aesthetically pleasing design. Matched with a Celeron M processor, 512MB memory and open architecture operating system, the PT-6200 is ready to handle any business environment you need.

### Special Features:

- Fanless design
- 10.4" Touch screen
- Magnetic card reader-tracks 1,2,&3
- 80mm thermal printer
- Modular design for easy maintenance
- Base designed with easy cable management
- Open architecture
- Integrated customer display

## All in One POS terminal PT-6200 Spec Sheet

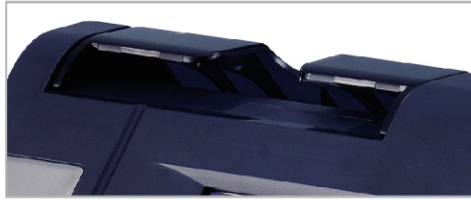

80mm Thermal receipt printer



1, 2 & 3 Track MSR reader



Integrated customer display

### Technical data

<b>LCD</b>	10.4" TFT-LCD, resolution is 800 x 600
<b>Touch</b>	5-wire Resistive touch (PS/2 interface)
<b>CPU</b>	Intel Celeron-M Processor @ 600MHz, L2 Cache 512KB, FSB 400MHz, fanless design
<b>Chipset</b>	NB - Intel 82852GM SB - Intel 82801DB
<b>Memory</b>	184-pin DDR DIMM x 1 , 512MB RAM standard
<b>BIOS</b>	Award System BIOS, 4M bits flash ROM
<b>Graphics</b>	Intel® 852GM integrated dynamic video shared memory Integrated LVDS connector for LCD support Max. shared memory of 64MB
<b>Ethernet</b>	Integrated 10/100/1000 Ethernet controller
<b>Audio</b>	Realtek Two-channel AC'97 2.3 Audio Codec
<b>HDD</b>	Internal 3.5" type IDE HDD 80GB or above
<b>I/O Interface</b>	4 * COM ports (COM1 & 2 are powered with DC+5V or DC+12V BIOS selection for voltage control. COM3 is powered with DC+5V or DC+12V Jumper selection control. COM4 is powered with DC+5V 1 * RJ-11 port for cash drawer(+24V) 1 * PS2 Keyboard port, auto routing for MSR, no jumper 1 * RJ-45 LAN port with activity and link LEDs 4 * USB ports 1 * DC +12V power adaptor connector
<b>Preipherals</b>	Tracks 1,2&3 MSR reader (PS/2 interface) Integrated customer display module (serial interface) 80mm Thermal receipt printer with cutter + control board (serial interface)
<b>Operating System</b>	Windows XP, XP embedded, CE.Net, Linux(Fedora, Red Hat & SuSE), WEPOS
<b>Power Supply</b>	AC 100V~240V/DC12V/12.5A 150 watt power adaptor
<b>Operating Temperature</b>	0°C~40°C
<b>Storage Temperature</b>	-20°C~60°C
<b>Operating &amp; Storage Humidity</b>	10%~80%
<b>Color</b>	Dark Charcoal
<b>Certification</b>	CE, FCC, UL, CUL, CB, VCCI, BSMI, 3C
<b>Dimension</b>	328mm (W) x 289.3mm (D) x 246.8mm (H)
<b>Weight</b>	8.5kg

### Partner Tech USA

Tel: +1-949-598-1888

Fax: +1-949-598-0088

E-mail: sales@partnertechcorp.com

Address: 51 Parker Irvine, CA 92618



REPRESENT BY: